

# SFB 2074

## Folding doors inward opening and outward opening

The SFB 2074 folding doors, provide an opportunity to have large openings in restaurants, cafés, shops, kiosks, and offices. The door profiles have a low U-value across the profile. The door leaves are interconnected with hinges placed on the inside or on the outside. The door opens by folding the door leaves together on the inside or on the outside of the room, forming a package next to

the door frame. The top edge of the door leaves are hung on rolling fittings. The glass rebates in the door leaves provide space for double or triple glazing units. The folding door profiles can be surface treated by anodising, powder coating or using the Decoral system. Apart from this, different colours and types of surface finish can be used on the inside and on the outside.






# Folding doors

## Functions

The door leaves of inward or outward opening folding doors can be up to 2500 mm high and up to 1000 mm wide. Total width: 6000 mm with 6 door leaves.

Door leaf weight: max 75 kg.

It is also possible to install horizontal cross-bars for optional marking. The folding doors are compatible with the SFB 4150 and 4060 facade systems.

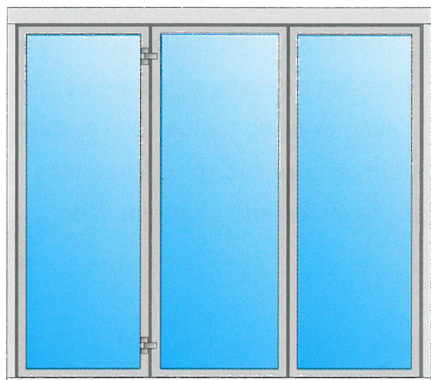



**Inward opening**  
Number of folding segments: 2, (3, 4)

**Wicket door**




**Outward opening**  
Number of folding segments: 2, (3, 4)

**Wicket door**

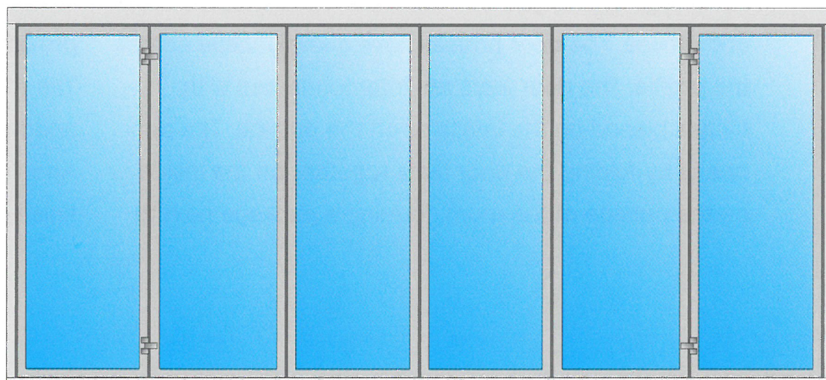

**Inward opening**  
Number of folding segments: 3


**Wicket door + 2 folding segments**




**Outward opening**  
Number of folding segments: 3

**Wicket door + 2 folding segments**

### Frame and leaf combinations in folding doors

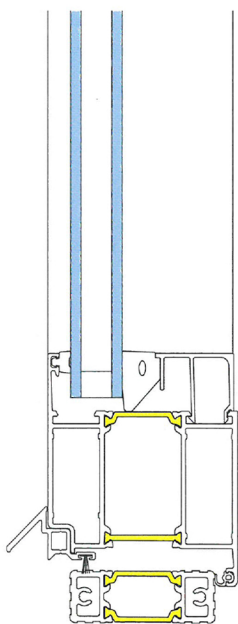

**Bottom edge of folding door with a stop bead against the threshold**

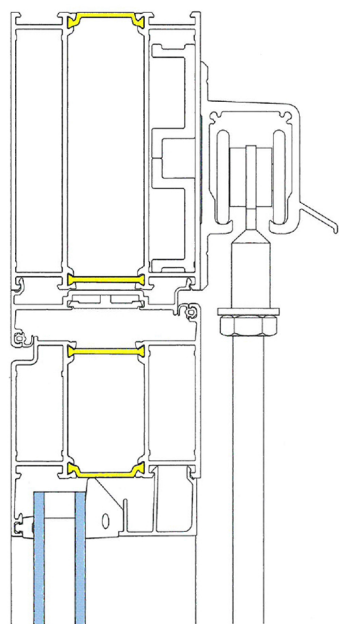

**Top edge of folding door with rolling fittings**

